



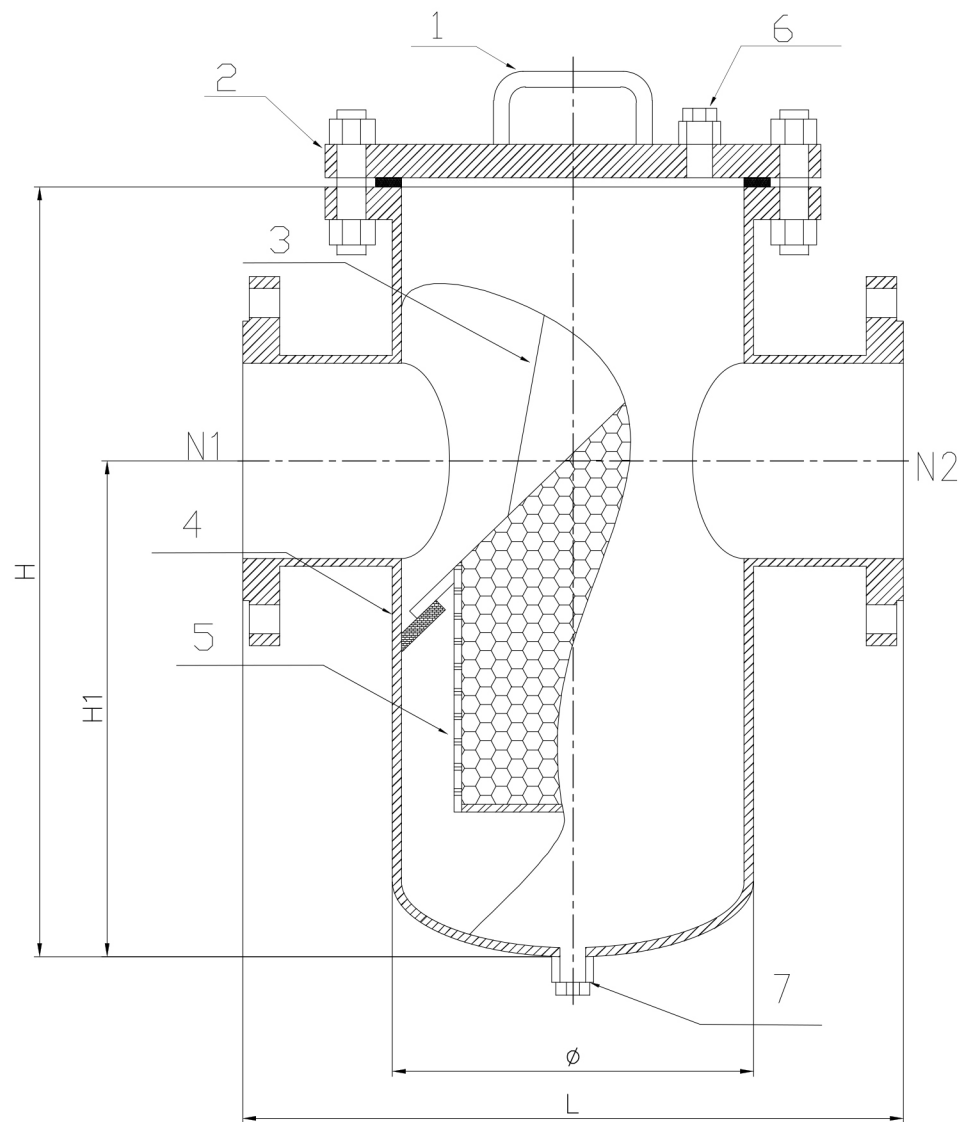

14	800	530	1260	900	535	476.3	413	33.4	12-Ø30
12	750	478	1160	840	485	431.8	381	30.2	12-Ø26
10	660	426	910	640	406	362	324	28.6	12-Ø26
8	560	325	760	530	345	298.5	270	27	8-Ø22
6	500	273	610	420	280	241.5	216	23.9	8-Ø22
4	400	219	460	300	230	190.5	157.2	22.3	8-Ø18
3	340	159	390	250	190	152.4	127	22.3	4-Ø18
2	300	130	330	220	150	120.7	92.1	19	4-Ø18
1 1/2	260	108	290	170	125	98.4	73	15.9	4-Ø18
NPS	L	ø	H	H1	D	D1	D2	C	n-d1

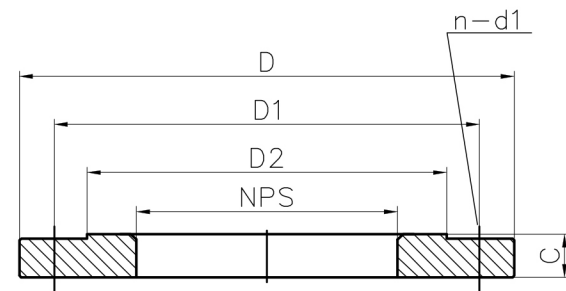

Technical Specification

1. Design and manufacture to SH/T3411-2017
2. Face-to-face to SH/T3411-2017
3. Flanged ends to HG/T20615-2009

Performance Specification			
Nominal Pressure		CLASS 150	
Test Pressure	Shell test	3.0	MPa
Working Temperature		-29~250℃	
Medium: water oil & gas			

5	screen	304			
4	body	WCB	N2	medium export	WCB
3	screen handle	304	N1	medium import	WCB
2	blind plate	WCB	7	drain	A105
1	handle	A105	6	airvent	A105
NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL

						CLASS 150 NPS 1 1/2~14 Basket Strainer	HBSC						
							DRAW MARK	WT.		SCALE			
MARK	QTY	FILE NO.		SIGN			DATE						
DESIGN				STANDARD									
CHECK													
TECHNOLOGY				DATE		26.01.12							
								DRAW REV. 00					
								HITEK PETROLEUM EQUIPMENT CO.,LTD					